



HYDRAULIC / ELECTRIC

ECOFRIDGE SLIMLINE 15



A SLIM PROFILE UNIT that delivers one of the highest refrigeration and freezing capacities on the market, despite having a depth of only 340 mm. Slimline 15 is designed specifically to fit trucks with a low box, making full use of the space between the box and cab.

The unit is mounted externally on the front wall and is equipped with our Display control system.

ECOFRIDGE

Slimline 15

- ▲ Hydraulic constant flow pump delivers full power regardless of speed
- ▲ Fuel savings of up to 60%
- ▲ Reduced CO₂, NO_x & PM emissions
- ▲ Lower service costs
- ▲ Mounts between the box and cab
- ▲ Mains connection 400 V
- ▲ Display control system

FUNCTION

THE UNIT IS POWERED BY A HYDRAULIC CONSTANT FLOW PUMP which is mounted directly on the truck's PTO. The unit can also be connected to the mains.

Delivers constant power whatever the engine speed. The 4-cylinder 560 cm³ compressor manufactured by Bock ensures a high and reliable refrigeration capacity. Heat is provided by electric and water heaters.

The slim profile Slimline 15 provides a reliable and very high refrigeration and freezing capacity.




TECHNICAL SPECIFICATIONS


Model	Refrigeration capacity*			Electric power*			Standard heat	Extra heat	Multizone	Weight
	Box temp 0°C	Box temp -10°C	Box temp -20°C	Box temp 0°C	Box temp -10°C	Box temp -20°C				
Slimline 15	9 200 W	7 000 W	5 000 W	6 300 W	6 000 W	4 700 W	Yes	No	Option	490 kg

*Refrigeration capacity specified at +30°C ambient temperature.

DIMENSIONS

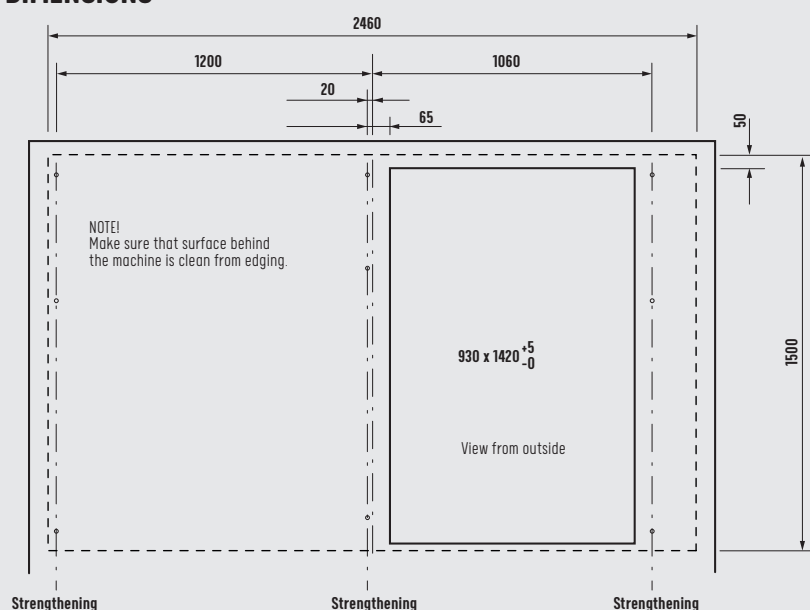

Dimensions in mm

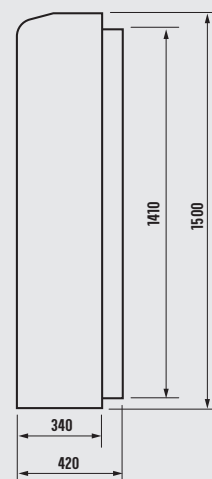

HULTSTEINS

Hultsteins UK | Unit 3, Guinness Park Farm, Leigh Sinton, Worcestershire, England, WR13 5EQ | Tel 01886 886169 | hultsteins.com